
T	۵	п	m	<u>с</u>







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium	
	-Shell Plating	: Olive drab Cadmium	
	-Insulator	: Thermoplastic	
	-Contacts	: Copper Alloy	
	-Seals & Grommet	: Silicon Elastomer	
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
	-Durability	: 500 Mating cycles	
-Delivered with Souriau contacts and Accessories			
	-Temperature Range	<sub>∶</sub> -65°C to +175°C	
	-Salt Spray	: 500 hours	

: 11.83 g ± 10%

8D 0

G

11

W

04

Ρ


F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

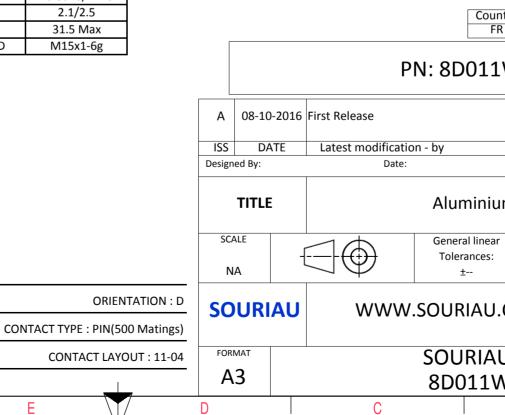

Φ					
			4		
AS EXAMPLE			3		
any non-conformit which does not co or of the Parties or I adation, technical n untry Jurisc R 1W04PD	mply with by a third party		2		
		 MOD N°			
	CUSTOMER DRAWING				
um Receptac	n Receptacle 8D series				
ar	NPRDS / PROJECT <b>859</b>		1		
I.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°					
W04PD-C	A	1/2	J		
2					

r	т	G	н <b>г</b>	m		0	
		Contact Layout					Panel Cutou
4	-x	$ \begin{array}{c}                                     $			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Contri posisi ID A B B C C D Shell Arrangement Num size no. cont	X-axis         Y-axis (mm)           +0.05 (1.65)         .065 (1.65)           +0.05 (1.65)         .065 (1.65)           -0.05 (1.65)         .065 (1.65)           -0.05 (1.65)         .065 (1.65)           -0.05 (1.65)         .065 (1.65)           ber of         Size         Service         Contact         Supersedes           acts         contacts         rating         location         Supersedes	]		₩		
ω	11 -4 4	4 20 I All MS20050-4	]			Din ØA ØA R1 ØT	A A
	-						
						SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products wh d by either of
N						DNI- S	Countr FR 3D011V
					A 08-10-2	2016 First Release	
					ISS DAT Designed By:	E Latest modification - by Date:	
					TITLE		luminium
<u> </u>					SCALE NA		neral linear olerances: ±
					SOURIA	WWW.SOU	JRIAU.C
					FORMAT A3		URIAU D011W
L	Н	G	F	E	D	C	

