

Issued on Feb. 18, 2004

Sales & Marketing Group  
-Electronic Components & Devices

Model GM1WA55360A

# 0.55-mm Thickness, RGB 3 Chip, Chip LED

## Features


- 0.55-mm thickness package enables thin LED module (30% thinner than the conventional models)
- High-luminosity RGB 3 chip enables wide color emission range

## Specifications

Parameter	Symbol	GM1WA55360A			Condition	Unit
		B	G	R		
Radiation color	—	Blue	Green	Red	—	—
Dominant wavelength(TYP.)	$\lambda_d$	472	527	628	$I_F=10\text{ mA}$	nm
Target intensity(TYP.)	$I_v$	(55)	(150)	(125)		mcd
Forward voltage(TYP.)	$V_F$	3.2	3.4	2.1		V
Operating temperature(TYP.)	$T_{opr}$	-20 to +80			—	°C


$T_a=25\text{ }^\circ\text{C}$

## Outline Dimensions (Unit : mm)

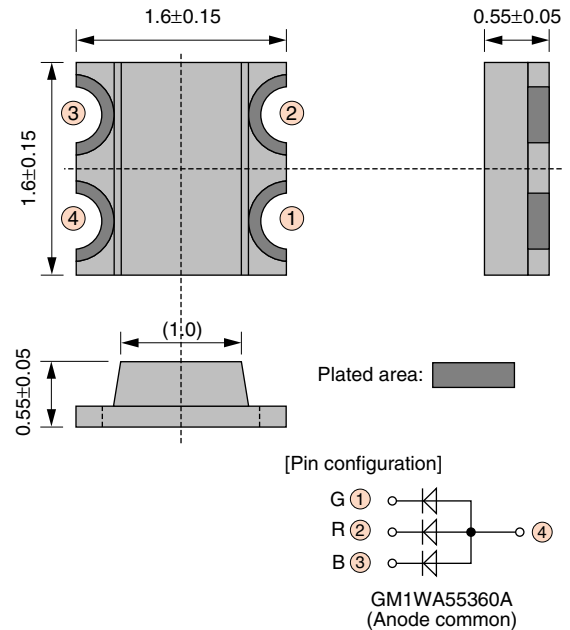

## Line-up

1616 size

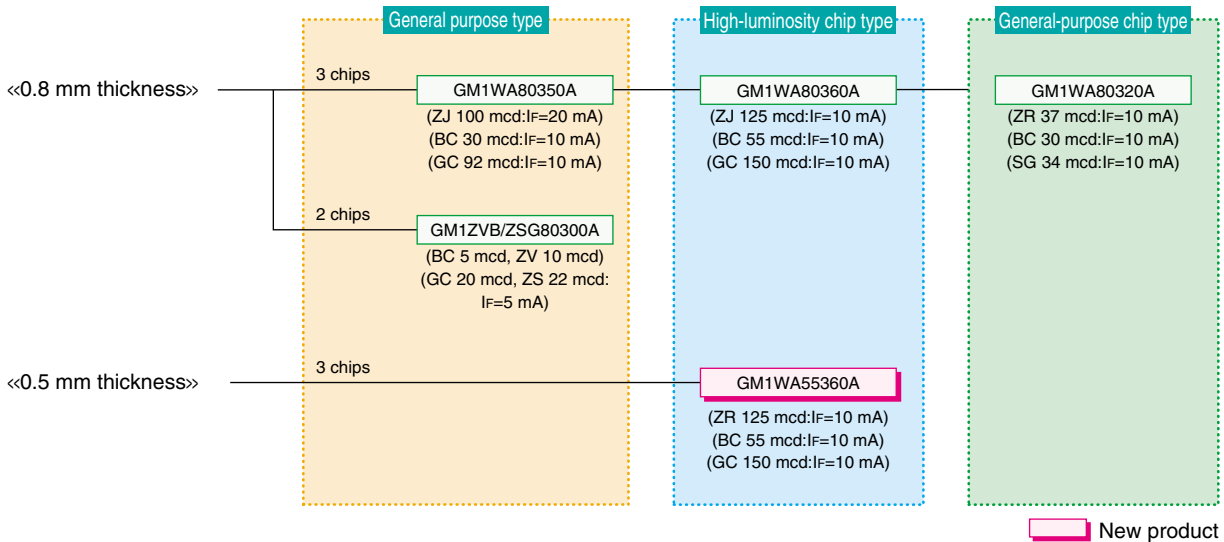

- In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP devices.

- Specifications, model names and availabilities are subject to change without notice for improvement.